





'Browse View' clearly shows the captured content:

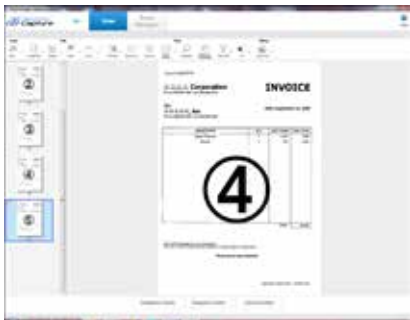

'Page View' reveals any additionally extracted information, such as invoice numbers, in an editable field:

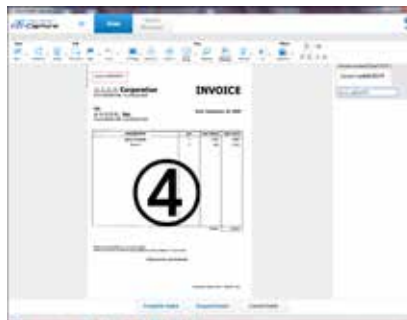

Creating and maintaining PaperStream profiles and capturing routines directly within PaperStream Capture 1.5 is intuitively easy:



Capture jobs in progress are displayed in a sorted list for higher visibility of processing status:




# Specifications

Model		fi-7030
Supported operating systems	See <a href="http://emea.fujitsu.com/fiscannerfaqs/">http://emea.fujitsu.com/fiscannerfaqs/</a> for further information	
Scanner type	Automatic Document Feeder (ADF)	
Scanning modes	Simplex / Duplex, Colour / Greyscale / Mono	
Image sensor type	Colour CIS (Contact Image Sensor) x 2 (front x 1, back x 1)	
Light source	3 Colour LED (Red / Green / Blue) x 2 (front x 1, back x 1)	
Multifeed detection	Ultrasonic multifeed detection sensor x 1, Paper detection sensor x 1	
Document size	Maximum	216 x 355.6 mm
	Minimum	50.8 x 50.8 mm
	Long page scanning <sup>1</sup>	216 x 5,588 mm
Recommended paper weight	40 to 209 g/m <sup>2</sup> / supports 127 to 209 g/m <sup>2</sup> for A8 size ID card types, Embossed card 0.76 mm or less	
Scanning speed (A4 Portrait) <sup>2</sup>	Simplex: 27 ppm (200/300 dpi), Duplex: 54 ipm (200/300 dpi)	
	Colour <sup>3</sup> / Greyscale <sup>3</sup> / Mono <sup>4</sup>	
Paper chute capacity (A4 Portrait) <sup>5</sup>	50 sheets (A4: 80 g/m <sup>2</sup> )	
Background colours	White	
Optical resolution	600 dpi	
Output resolution <sup>6</sup>	Colour / Greyscale / Mono	50 to 600 dpi (adjustable by 1 dpi increments), 1,200 dpi (driver) <sup>7</sup>
Output format	Colour: 24 bit, Greyscale: 8 bit, Mono: 1 bit	
Internal video processing	1,024 levels (10-bit)	
Interface / Connector shape	USB 2.0 / USB 1.1 / B type	
Image processing functions	Deskew, Cropping, Image emphasis, Error diffusion, Dither, Black & White Method, Dynamic threshold (iDTC), Static threshold, Advanced DTC, SDTC, De-Screen, Dropout colour (Red / Green / Blue / White / None / Saturation / Custom), Automatic colour detection, Multi image output, Blank page detection, sRGB output, Split image, Front/Back Merging	
Power requirements	AC 100 to 240 V ±10%	
Power consumption	Operating mode: 17 W or less / Sleep mode: 1.1 W or less / Auto standby (off) mode: 0.15 W or less	
Operating environment	Temperature: 5 to 35°C / Relative humidity: 20 to 80% (Non-condensing)	
Dimensions (W x D x H) <sup>8</sup> / Weight	290 x 146 x 130 mm / 2.9 kg	
Included software / drivers	PaperStream IP (TWAIN / TWAIN x64 / ISIS), PaperStream Capture, Software Operation Panel, Error Recovery Guide, ScanSnap Manager for fi Series <sup>9</sup> , Scan to Microsoft SharePoint <sup>9</sup> , ABBYY FineReader for ScanSnap <sup>TM9</sup> , Scanner Central Admin Agent	
Environmental compliance	ENERGY STAR <sup>®</sup> and RoHS <sup>10</sup>	
Included items	ADF paper chute, AC cable, AC adapter, USB cable, Setup DVD-ROM	

<sup>1</sup> The fi-7030 is capable of scanning documents that exceed A4 in length: Documents up to 5,588 mm in length can be scanned at resolutions up to 200 dpi.  
<sup>2</sup> Actual scanning speeds are affected by data transmission and software processing times.  
<sup>3</sup> JPEG compressed figures.  
<sup>4</sup> TIFF G4 compressed figures.  
<sup>5</sup> Maximum capacity varies, depending upon paper weight.  
<sup>6</sup> Maximum output resolutions may vary, depending upon the size of the area being scanned and whether the scanner is scanning in simple or duplex.  
<sup>7</sup> Scanning limitations due to scanning mode, document size and available memory may occur when scanning at high resolutions (600 dpi or higher).  
<sup>8</sup> Excluding the ADF paper chute and Stacker.  
<sup>9</sup> The software can be downloaded from the website designated in the Setup DVD-ROM.  
<sup>10</sup> PFU LIMITED, a Fujitsu company, has determined that this product meets RoHS requirements (2011/65/EU)



All names, manufacturer names, brand and product designations are subject to special trademark rights and are manufacturer's trademarks and/or registered brands of their respective owners. All indications are non-binding. Technical data is subject to change without prior notification.



**PFU (EMEA) Limited**  
 Hayes Park Central  
 Hayes End Road, Hayes  
 Middlesex UB4 8FE  
 United Kingdom

Tel: +44 (0)20 8573 4444

**PFU (EMEA) Limited**  
 Frankfurter Ring 211  
 80807 Munich  
 Germany

Tel: +49 (0)89 32378 0

**PFU (EMEA) Limited**  
 Viale Monza, 259  
 20126 Milano (MI)  
 Italy

Tel: +39 02 26294 1

**PFU (EMEA) Limited**  
 Camino Cerro de los Gamos, 1  
 28224 Pozuelo de Alarcón  
 Madrid  
 Spain

Tel: +34 91 784 90 00

<http://emea.fujitsu.com/scanners>

